



VORTEX G4 520 PTH

Tedders - Trailed version

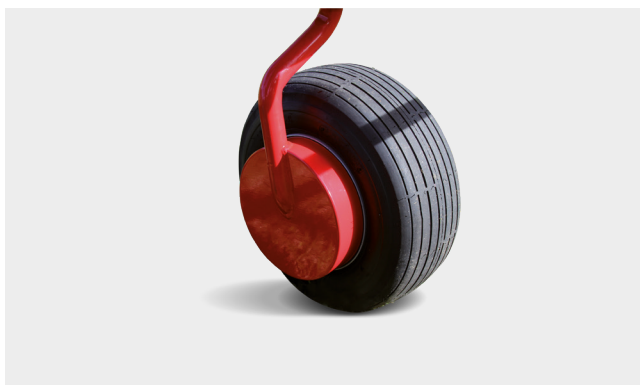

Internal wheels with standard hay guard.

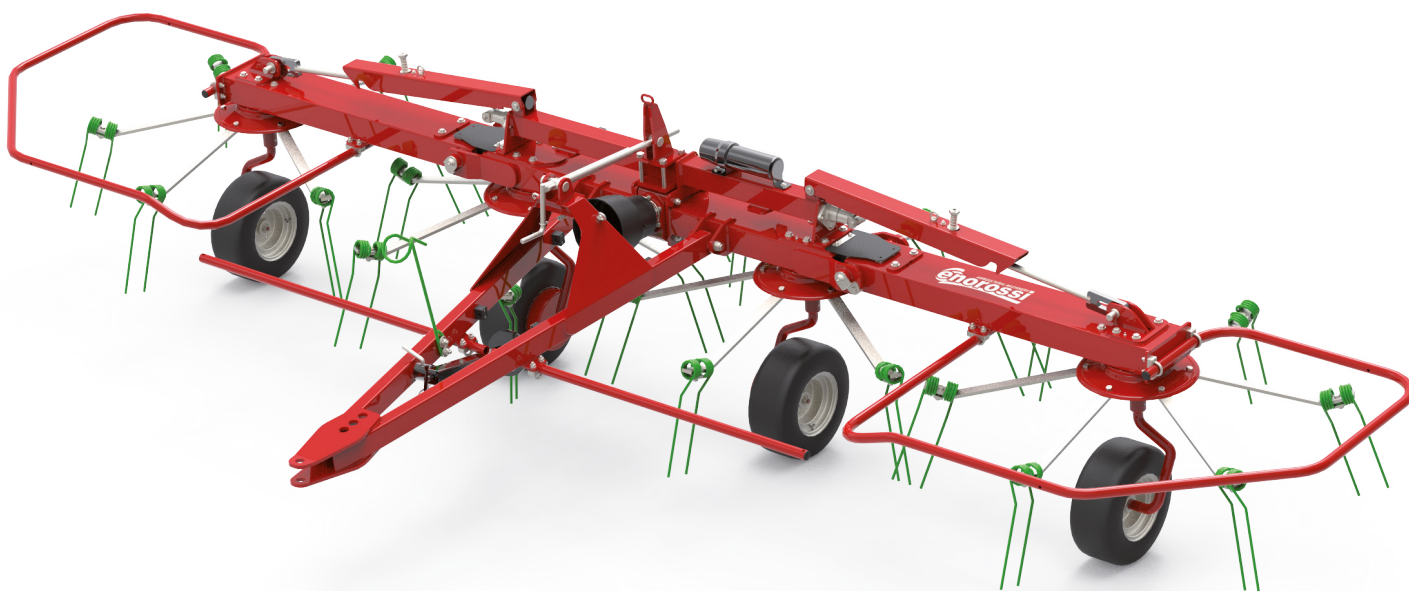

Mechanical working angle adjustment.
Standard on the G4 520 PTH

		G4-520 PTH
	Working width	520 cm / 17 ft
	Transport width	300 cm / 9.8 ft
	Transport height	265 cm / 8.7 ft
	Transport lenght	275 cm / 9 ft
	Closure of external rotors for transport	Hydraulic
	N° of rotors	4
	N° of tine arms per rotor	6
	Linkage	Trailed
	Headstock	-
	Rotor tyre	4x 16x6.50-8
	Tyre tray	-
	Weight	490 kg / 1080 lbs
	Minimum power required	50 HP
	Required tractor hydraulic connections	1 SE (+ 1 DE optional)
	Hydraulic lifting of the rotors on the headlands	-
	Deflectors for rotor wheels	•
	Road signaling kit	-
	Working angle adjustment	Mechanical
	Cardan	•

OPTIONAL	G4-520 PTH
Tine saver	☒
Additional support wheel	-
Spread guard for headlands work	-
Hydraulic working angle adjustment	☒
Lights kit	-

• Standard ☒ Optional available - Not available



Via dell'industria, 2 - 06019 Calzolaro di Umbertide (PG) - ITALY
tel. +39 075 930 22 22 - info@enorossi.it - www.enorossi.it



Exclusive Distributor-Asian Market
(India, Bangladesh & Nepal)



Inceptions & Solutions
Driven by Innovations

Zentrum Inagri Tek

Ganpati Enclave, Humbran Village Gounspur,
Ludhiana 141110, Punjab, India
zentrumindia@gmail.com www.zentrumgroup.in
0091 987 6135 365